

## SINGLE-USE USB PDF TEMPERATURE RECORDER



### Single-Use USB PDF Temperature Recorder

# USRIC-8

LogTag® USRIC-8 is a single-use, cost effective & reliable temperature recorder, measures and stores real time temperature readings over a measurement range of -30°C to +60°C (-22°F to +140°F). The USRIC-8


combines all the features of an advanced temperature recorder with an 8,000 log memory with a shelf life of up to two years before configuration (in standard hibernation mode) and a 6-month operating life in a robust and inexpensive package.

- Suitable for multiple independent receivers, clinical trials and last-mile distribution.
- Integral USB connector - no separate Interface Cradle required.
- Automatically generates a PDF report - no special software required.
- Comprehensive customization options including alert settings, sample interval and trip duration.
- Automatically generates an encrypted LogTag data file for a more detailed analysis.
- Customize start options, logging interval, alert parameters and many more.
- Up to 8,000 recordings - enough for the longest trip.
- Push-to-start button with optional delay or a specific time & date.
- Six user-configurable alarms.

*View more information about the USRIC-8 at [www.logtagrecorders.com](http://www.logtagrecorders.com)*

# LogTag Recorders

- Plugs directly into the computer USB for easy configuration by the user for a wide range of recording and alert conditions for up to six alarms.
- A green OK indicator provides immediate visual confirmation that the unit is operating.

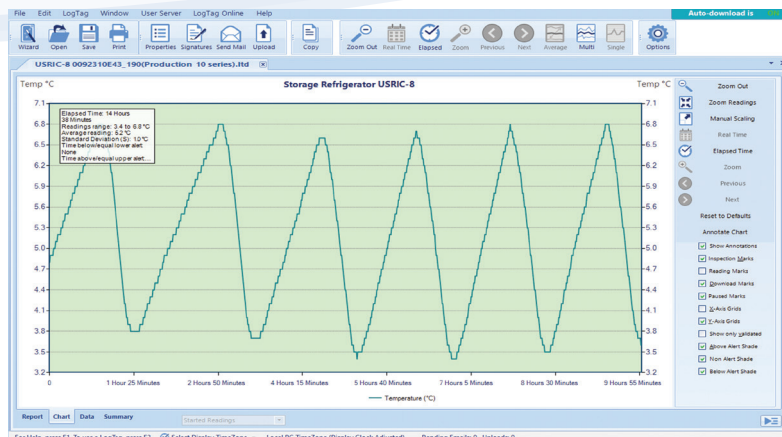

## LogTag Analyzer 3

When the USRIC-8 is connected to a computer using the USB plug, a detailed PDF report is automatically generated with the option to download the data using the freely available LogTag® Analyzer software for a more detailed analysis.

<b>Product Model</b>	USRIC-8
<b>Sensor Measurement Range</b>	-30°C to +60°C (-22°F to +140°F).
<b>Operating Temperature Range</b>	-30°C to +60°C (-22°F to +140°F).
<b>Storage Temperature Range</b>	0°C to +40°C (32°F to +104°F).
<b>Rated Temperature Reading Accuracy</b>	Better than $\pm 0.5^{\circ}\text{C}$ ( $\pm 0.9^{\circ}\text{F}$ ) for $-5^{\circ}\text{C}$ to $+30^{\circ}\text{C}$ ( $23^{\circ}\text{F}$ to $+86^{\circ}\text{F}$ ). $\pm 0.8^{\circ}\text{C}$ ( $\pm 1.5^{\circ}\text{F}$ ) or better for measurements in other areas of rated range. <i>Actual performance is typically much better than the rated values. Accuracy figures can be improved by recalibration.</i>
<b>Rated Temperature Reading Resolution</b>	$< 0.1^{\circ}\text{C}/^{\circ}\text{F}$ <i>LogTag Analyze® currently displays to one decimal place of °C or °F. The native resolution is what is stored in the LogTag®.</i>
<b>Sensor Reaction Time</b>	Typically less than 5 minutes (T90) in moving air (1m/s).
<b>Recording Capacity</b>	8,001 temperature readings. 26.6 days @ 5min logging, 80 days @ 15min logging.
<b>Sampling Interval</b>	Configurable from 1 minute to 18 hours.
<b>Logging Start Options</b>	Push button start or specific date & time.
<b>Recording Indication</b>	Flashing 'OK' indicator / flashing 'ALERT' indicator.
<b>Alarms</b>	6 user-configurable alarms.
<b>Download Time</b>	Typically with full memory (8,001 readings) in less than 20 seconds from time of insertion to availability of PDF report. Typically less than 10 seconds from time of insertion to availability of LTD file in LogTag® Analyzer (if configured).
<b>Environmental</b>	IEC 60529: IP64 with USB cap fitted.
<b>Power Source</b>	3V LiMnO <sub>2</sub> Battery.
<b>Battery Life</b>	Shelf life of up to two years before configuration (in standard hibernation mode). Six months operating life from the time of configuration.
<b>Real Time Clock</b>	Built-in real time clock. Rated accuracy $\pm 25\text{ppm}$ @ $25^{\circ}\text{C}$ (equivalent to 2.5 seconds/day). Rated temperature coefficient is $-0.034 \pm 0.006\text{ppm}/^{\circ}\text{C}$ (i.e typically $\pm 0.00294$ seconds/day/ $^{\circ}\text{C}$ ).
<b>Connection Interface</b>	USB 2.0, A-type plug.
<b>Software</b>	PDF Reader, LogTag® Analyzer 2.5 or higher.
<b>Size</b>	93mm(H) x 54.5mm(W) x 8.6mm(T) including protective USB cap.
<b>Weight</b>	31g.
<b>Case Material</b>	Polycarbonate.